



# DH45W10 SERIES 45 WATT 10:1 INPUT ISOLATED DC-DC CONVERTER

## Features

- Efficiency Up to 90%
- Regulated Outputs
- Fully Protected (OCP/OVP/UVLO)
- 4000Vac I/O Isolation
- Operating Temperature -40 to +80°C
- UL 1741, CSA-C22.2 No.107.1, EN62109-1 Approval
- Shock & Vibration MIL-STD-810F Compliant
- 5000m Operating Altitude
- Input Reverse Polarity Protection



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF. (1)	CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD		
DH45W10-800S12	150-1500 VDC	12 VDC	0 mA	3.75 A	0.5 mA	64.6 mA	87	3750uF
DH45W10-800S15	150-1500 VDC	15 VDC	0 mA	3.00 A	0.5 mA	63.9 mA	88	3000uF
DH45W10-800S24	150-1500 VDC	24 VDC	0 mA	1.87 A	0.5 mA	63.2 mA	89	1870uF
DH45W10-800S48	150-1500 VDC	48 VDC	0 mA	0.938 A	0.5 mA	62.5 mA	90	938uF

NOTE:  
 1. Nominal Input Voltage 800 V<sub>dc</sub>.  
 2. Measured at Nominal Input Voltage.

## PART NUMBER

Series	Nominal Input Voltage	Number of Outputs	Nominal Output Voltage	Installation Type
DH45W10-	II	O	XX	-Y
DH45W10	800 : 800 VDC	S : Single	12 : 12VDC 15 : 15VDC 24 : 24VDC 48 : 48VDC	P : PCB Mount

Part Number Example:  
**DH45W10-800S12P**: 30W, 10:1 150-1500Vdc Input, Single 12Vdc Output, PCB Mounting



# DH45W10 Series

## TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

### ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Continuous	All	-1500	800	1500	V <sub>dc</sub>
Operating Temperature	With de-rating, above 50°C	All	-40		80	°C
Storage Temperature		All	-40		85	°C

### INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units	
Operating Input Voltage		All	150	800	1500	V <sub>dc</sub>	
Input Under Voltage Lockout							
Turn-On Voltage Threshold	Full load	All	110	121	132	V <sub>dc</sub>	
Turn-Off Voltage Threshold	Full load	All	96	109	121	V <sub>dc</sub>	
Lockout Hysteresis Voltage	Full load	All		10		V <sub>dc</sub>	
Maximum Input Current	V <sub>in</sub> =150V, Full load	All		0.4		A	
No-Load Input Current	V <sub>in</sub> =800V, I <sub>o</sub> =0A	See Model Number Table					mA
Input Filter	Capacitive	All					
Inrush Current	V <sub>in</sub> =800V <sub>dc</sub> , Cold Start at 25°C	All		90	150	A	

### OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Voltage Set Point Accuracy	V <sub>in</sub> =800V, Full load, T <sub>c</sub> =25°C	All	-2.0		+2.0	%
Output Voltage Regulation						
Load Regulation	Full load to no load	All			±1.0	%
Line Regulation	V <sub>in</sub> =High line to low line, full load	All			±1.0	%
Temperature Coefficient	T <sub>c</sub> =-40°C to 80°C	All			±0.15	%/°C
Output Voltage Ripple and Noise (5Hz to 20MHz bandwidth)						
Peak-to-Peak	Full load, 10uF aluminum capacitor and 0.1uF ceramic capacitor	12V <sub>o</sub>			120	mV
		15V <sub>o</sub>			150	
		24V <sub>o</sub>			150	
		48V <sub>o</sub>			240	
Output Current Range	V <sub>in</sub> = 150 to 1500V	See Model Number Table				A
Over Current Protection	Hiccup mode. Auto recovery	All	110		300	%
Short Circuit Protection		All	Continuous, Auto Recovery			
External Load Capacitance	Full load (Constant resistive load)	See Model Number Table				uF
Over Voltage Protection	IC component to clamp (auto recovery)	12V <sub>o</sub>			16	V <sub>dc</sub>
		15V <sub>o</sub>			19	
		24V <sub>o</sub>			30	
		48V <sub>o</sub>			59	

### EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
100% Load	V <sub>in</sub> =800V, Full load	See Model Number Table				%

### DYNAMIC CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Current Transient						
Error Band	75% to 100% of I <sub>o,max</sub> . step load change d <sub>i</sub> /d <sub>t</sub> =0.1A/us (within 1% V <sub>out</sub> nominal)	All			±5	%
Recovery Time		All			250	us



# DH45W10 Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Turn-On Delay and Rise Time	Full load (Constant resistive load)					
Turn-On Delay Time, From Input	$V_{in\_min.}$ to 10% $V_{o\_set}$ , Power up	All		450		ms
Output Voltage Rise Time	10% $V_{o\_set}$ to 90% $V_{o\_set}$	All		8		ms

## ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Isolation Voltage (100% factory Hi-Pot tested @2sec.)	1 Minute; input to output	All			4000 5656	$V_{ac}$ $V_{dc}$
Isolation Resistance	Input to output	All	100			M $\Omega$
Isolation Capacitance	Input to output	All		1100		pF

## FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	Pulse width modulation (PWM) ( $V_{in} = 150V_{dc} - 1500V_{dc}$ , Full load)	All	25		75.6	KHz

## GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o = 100\%$ of $I_{o\_max.}$ ; MIL-HDBK - 217F_Notice 1, GB, 25°C	All	300			K hours
Weight		All		240		grams
Case Material	Plastic, PBT, UL 94V-0					
Base Plate Material	Non-Conductive Base					
Potting Material	UL 94V-0					
Pin Material	Base: Copper Plating: Nickel with Matte Tin					
Shock/Vibration	MIL-STD-810F					
Humidity	95% RH max. Non Condensing					
Altitude	5000m Operating altitude, 12000m Transport altitude					
Thermal Shock	MIL-STD-810F					


## EMC SPECIFICATIONS (External components required, please refer to application note.)

EMI	Meets EN 55032 Compliant (with external filter)				Class A	
ESD	EN61000-4-2	Level 3: Air $\pm 8kV$ , Contact $\pm 4kV$			Perf. Criteria A	
Radiated Immunity	EN61000-4-3	Level 3: 80~1000MHz, 20V/m			Perf. Criteria A	
Fast Transient	EN61000-4-4	Level 2: On power input port, $\pm 0.5kV$ , external input capacitor required			Perf. Criteria A	
Surge	EN61000-4-5	Level 4: Line to line, $\pm 2kV$ (with external components)			Perf. Criteria A	
Conducted Immunity	EN61000-4-6	Level 3: 0.15~80MHz, 10V			Perf. Criteria A	
Power Frequency Magnetic Field Immunity	EN61000-4-8	50/60Hz, 3A/m (r.m.s.)			Perf. Criteria A	
Application Note Link						<a href="#">DH45W10 Series App Notes</a>
Packaging Information Link						<a href="#">Packaging Information</a>







## CHARACTERISTIC CURVE

### Power Derating Curve

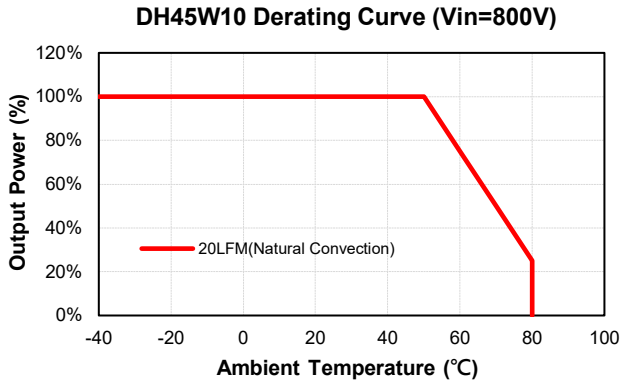


### Performance Data

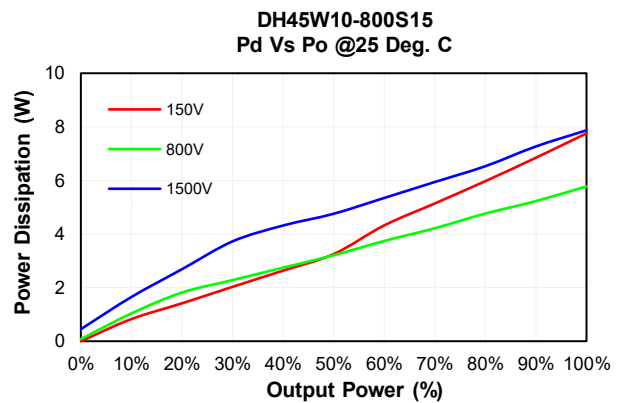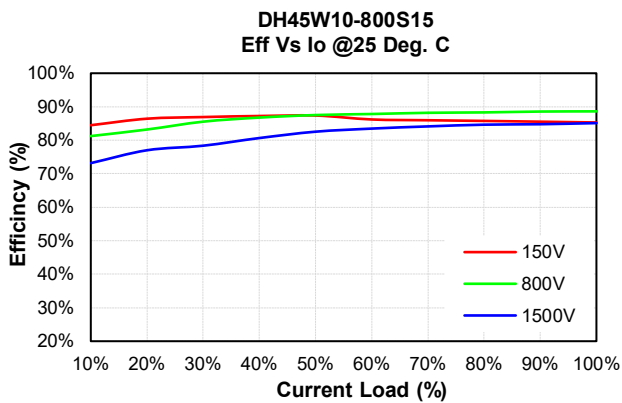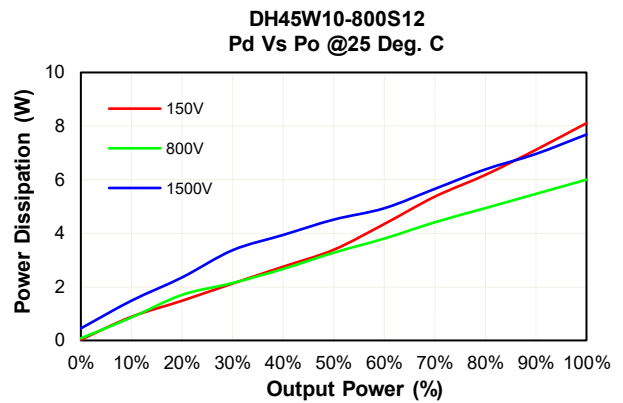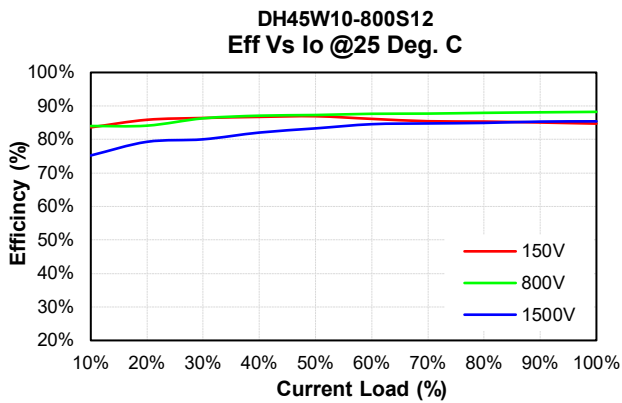




# DH45W10 Series


**DH45W10-800S24**  
Eff Vs Io @25 Deg. C

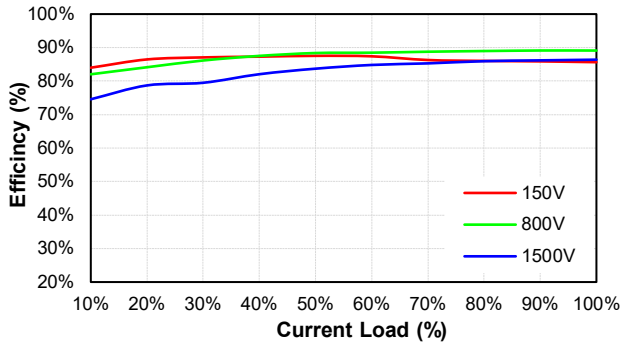


**DH45W10-800S24**  
Pd Vs Po @25 Deg. C

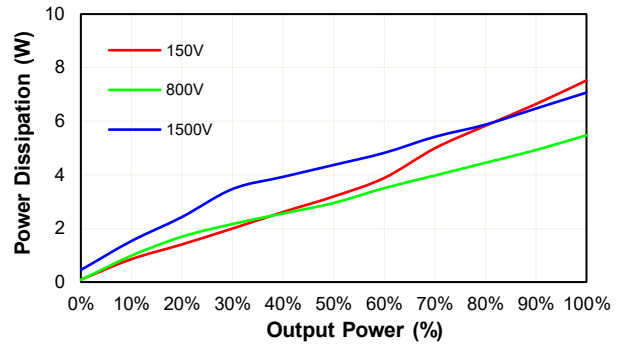

**DH45W10-800S48**  
Eff Vs Io @25 Deg. C

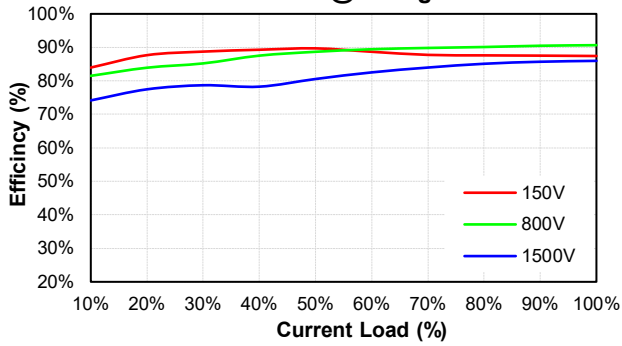


**DH45W10-800S24**  
Pd Vs Po @25 Deg. C

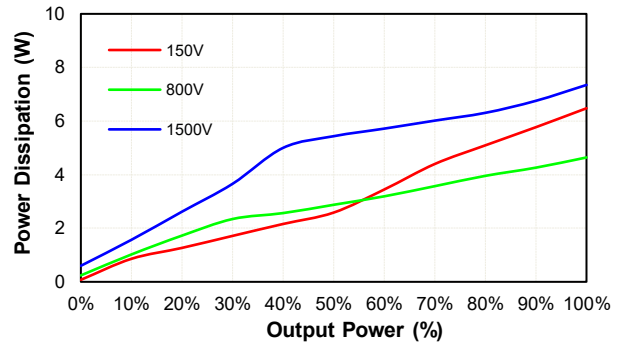



# DH45W10 Series

## MECHANICAL SPECIFICATION

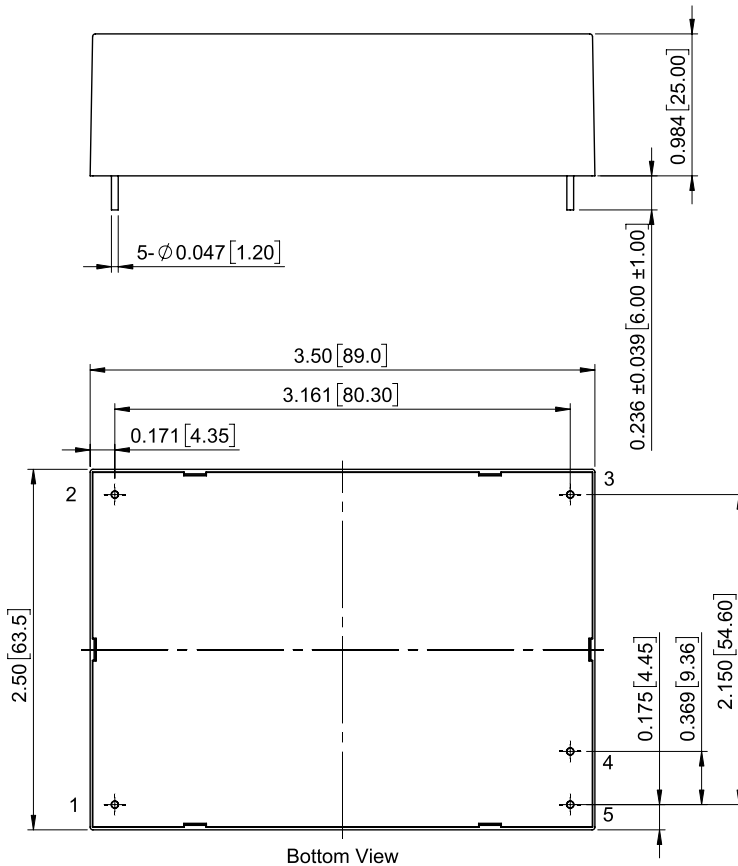

All Dimensions in Inches[mm]  
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020  
 Millimeters: x.x=±0.7, x.xx=±0.50

### Pin Connection

Pin	Function
1	-Vin
2	+Vin
3	NC
4	-Vout
5	+Vout

Note: Pin Size is  $\phi 0.047 \pm 0.004$  Inch [ $\phi 1.20 \pm 0.1$  mm]