

EC543-ADS

Q670E



12th Gen Intel® Core™
Modular-Designed Embedded System



KEY FEATURES



DDR4

DDR4 SODIMM up to 64GB



PoE

Support 4 PoE (EC543-ADS62GA6E-Q)




Three Independent Displays

1 VGA + 2 HDMI/DP++ (auto detection)



Support 5G Communication

Support 5G communication



Multiple Expansion

3 PCIe, 1 PCI and 3 M.2 slots support NVMe




Wide-Temperature

Operating Temperature: -20 to 60°C




IoT Solutions Alliance

PANEL

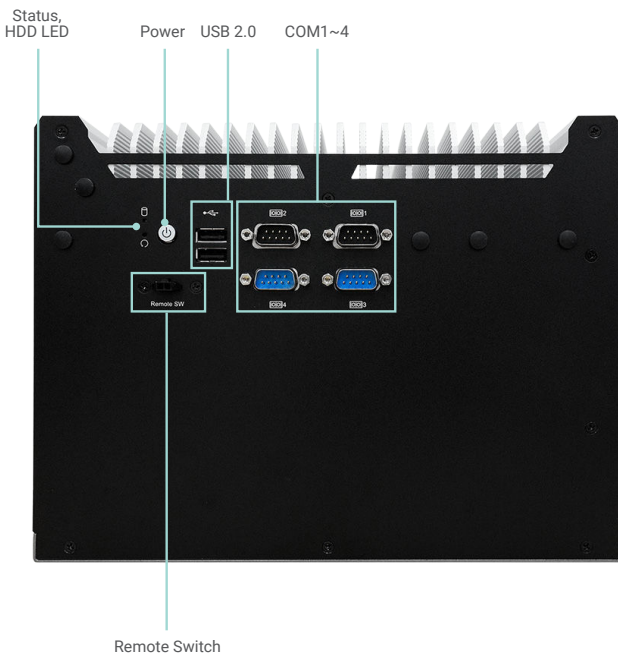


Front View

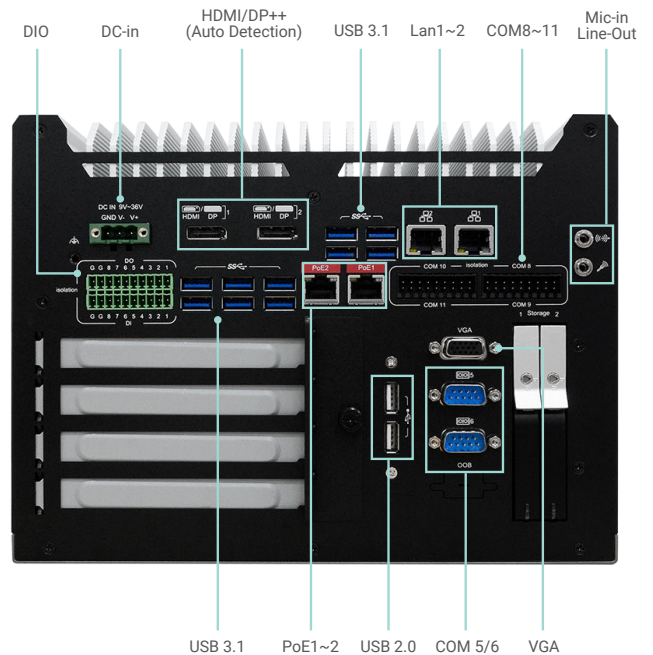


Rear View



DIMENSIONS




Rear View



Left View





Right View



Front View

WALL MOUNTING

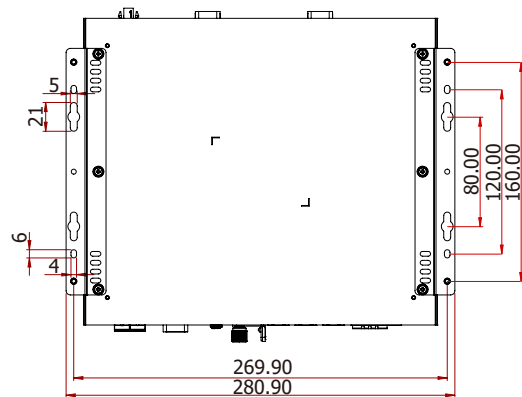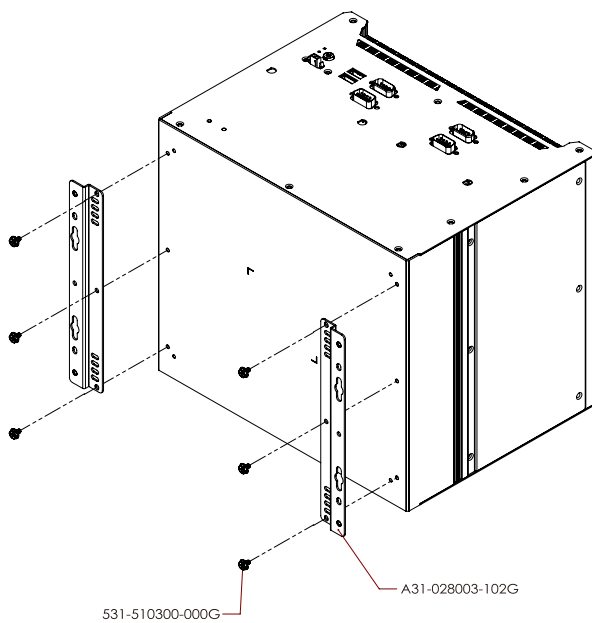

SPECIFICATION

SYSTEM	Processor	12th Generation Intel® Core™ Processors, LGA 1700 Intel® Core™ i9-12900TE (16 Cores, 30M Cache, up to 4.8GHz); 35W Intel® Core™ i7-12700TE (12 Cores, 25M Cache, up to 4.6GHz); 35W Intel® Core™ i5-12500TE (6 Cores, 18M Cache, up to 4.3GHz); 35W Intel® Core™ i3-12100TE (4 Cores, 12M Cache, to 4GHz); 35W Intel® Pentium® G7400TE (2 Cores, 6M Cache, 3GHz); 35W Intel® Celeron® G6900TE (2 Cores, 4M Cache, 2.4GHz); 35W		
	Chipset	Intel® Q670E Chipset		
	Memory	Two 260-pin DDR4 3200MHz SODIMM up to 64GB		
	BIOS	AMI SPI 128Mbit		
GRAPHICS	Controller	Intel® HD Graphics		
	Feature	OpenGL up to 5.0, DirectX 11, OpenCL 2.1 HW Decode: HEVC/H.265, H.264, M/JPEG, MPEG2, VC1/WMV9, VP8 (8-bit), VP9 (10-bit) HW Encode: HEVC/H.265, M/JPEG, MPEG2, VP8		
	Display	1 x VGA 2 x HDMI/DP++ (auto detection) VGA: resolution up to 1920x1200 @ 60Hz HDMI: resolution up to 4096x2160 @ 30Hz DP++: resolution up to 4096x2304 @ 60Hz		
	Triple Displays	VGA + 2 x HDMI/DP++ (auto detection)		
STORAGE	Interface	2 x 2.5" SATA 3.0 Drive Bay support RAID 0/1		
EXPANSION	Interface	1 x M.2 2230 E key (PCIe/USB 2.0) 1 x M.2 2280 M key (PCIe x4 NVMe/SATA) 1 x M.2 3042/3052 B key (PCIe/USB 3.0) 1 x PCI slot 1 x PCIe x16 @Gen3, x16 slot 1 x PCIe x4 @Gen3, x8 slot 1 x PCIe x1 @Gen3, x4 slot		
AUDIO	Audio Codec	ALC888		
ETHERNET	Controller	2 x Intel® i225-IT		
	Interface	RJ-45		
LED	Indicators	1 x Status LED 1 x HDD LED		
FRONT I/O	Serial	4 x RS-232/422/485 (DB-9)		
	USB	2 x USB 2.0 (type A)		
	Buttons	1 x Power button 1 x Reset button		
	Antenna	6 x Antenna hole		
REAR I/O	Ethernet/PoE	EC543-ADS6881-Q	EC543-ADS62GA6E-Q	EC543-ADS62GA6-Q
		2 x GbE (RJ-45)	2 x GbE (RJ-45) 4 x PoE	6 x GbE (RJ-45)
		EC543-ADSAGE4E-Q	EC543-ADSAGE4-Q	
		2 x GbE (RJ-45) 2 x PoE	4 x GbE (RJ-45)	
	Serial	EC543-ADS6881-Q	EC543-ADS62GA6E-Q	EC543-ADS62GA6-Q
		2 x RS232	2 x RS232	2 x RS232
		EC543-ADSAGE4E-Q	EC543-ADSAGE4-Q	
		2 x RS232 4 x RS232/422/485 (w/ 2KV isolation)	2 x RS232 4 x RS232/422/485 (w/ 2KV isolation)	
	USB	EC543-ADS6881-Q	EC543-ADS62GA6E-Q	EC543-ADS62GA6-Q
		4 x USB 3.1 (Gen2) 2 x USB 2.0	4 x USB 3.1 (Gen2) 2 x USB 3.1 (Gen1) 2 x USB 2.0	4 x USB 3.1 (Gen2) 2 x USB 3.1 (Gen1) 2 x USB 2.0
		EC543-ADSAGE4E-Q	EC543-ADSAGE4-Q	
		4 x USB 3.1 (Gen2) 6 x USB 3.1 (Gen1) 2 x USB 2.0	4 x USB 3.1 (Gen2) 6 x USB 3.1 (Gen1) 2 x USB 2.0	
	DIO	EC543-ADS6881-Q	EC543-ADS62GA6E-Q	EC543-ADS62GA6-Q
		8 bits DIO	32 bits DIO (w/ 2KV isolation)	32 bits DIO (w/ 2KV isolation)
		EC543-ADSAGE4E-Q	EC543-ADSAGE4-Q	
		16 bits DIO (w/ 2KV isolation)	16 bits DIO (w/ 2KV isolation)	
Display	1 x VGA 2 x HDMI/DP++ (auto detection)			
Audio	1 x Line-out 1 x Mic-in			
WATCHDOG TIMER	Output & Interval	System reset, programmable via software from 1 to 255 seconds		
SECURITY	TPM	TPM 2.0		

SPECIFICATION

POWER	Type	Wide range 9~36V
	Connector	3-pole terminal block 2-pin power extension switch connector
OS SUPPORT	Microsoft	Windows 10 IoT Enterprise 64 Bit
	Linux	Linux (available upon request)
ENVIRONMENT	Operating Temperature	-20 to 60°C (SSD or mSATA)
	Storage Temperature	-20 to 85°C
	Relative Humidity	5 to 95% RH (non-condensing)
MECHANICAL	Construction	Metal + Aluminum
	Mounting	Wall mount
	Dimensions (W x H x D)	255.3 x 195 x 221.1mm
	Weight	5.4 kg
STANDARDS AND CERTIFICATIONS	Shock	Half sine wave 3G, 11ms, 3 shock per axis
	Vibration	IEC68-2-64
	Certifications	CE, FCC Class A, UKCA, BIS

SYSTEM MODELS

Model Name	P/N	CPU	PCH	Expansion Slot	Video output	Audio	COM	USB 3.1	USB 2.0	LAN	PoE	DIO	TPM
EC543-ADS6881-Q	750-EC5431-000G	i5-12500TE	Q670E	1 PCIe x16 1 PCIe x4 1 PCIe x1 1 PCI	2 HDMI/DP 1 VGA	1 Line-out 1 Mic-in	6	4	4	2	0	8 bits	Yes (TPM2.0)
EC543-ADS62GA6E-Q	750-EC5431-100G						6	6	4	2	4	32 bits	
EC543-ADS62GA6-Q	750-EC5431-200G						6	6	4	6	0	32 bits	
EC543-ADSAGE4E-Q	750-EC5431-300G						10	10	4	2	2	16 bits	
EC543-ADSAGE4-Q	750-EC5431-400G						10	10	4	4	0	16 bits	

PACKING LIST

• 1 EC543-ADS system unit
• 1 M.2 slot screws
• 1 terminal block 3-pole for DC input
• 1 cable with 2 wire stripped and tinned to DC jack