




# CFM300S SERIES 300 WATT AC-DC POWER SUPPLY WITH PFC

## Features

- Universal Input Range 90~264Vac
- High Efficiency up to 94%
- 3"x 5" Compact Size
- Meets Class I
- No Load Input Power Consumption<0.3W
- Approval Safety IEC/EN/UL 62368-1
- Meets EN 55032 and EN 55022 Class B
- Active PFC Meets EN 61000-3-2 Class C&D
- Operating Altitude 5000m
- High Power Density 14.1W/Inches<sup>3</sup>
- Over Temperature Protection
- Continuous Short Circuit Protection
- Remote Voltage Sense
- PS On/Off Remote Control
- Power Good & Power Fail Signal
- +5V Stand-by, 12V Fan Output

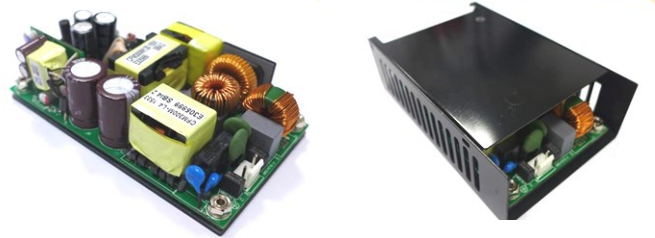

MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT		RIPPLE& NOISE NOTE2	VOLTAGE ACCURACY NOTE3	VOLTAGE ADJ. RANGE	LINE REGULATION NOTE4	LOAD REGULATION NOTE5	% EFF. (Typ.) NOTE6
		FAN COOLED NOTE1	NATURAL CONVECTION						
CFM300S120	12 V	25 A	16.67 A	120 mV	±1%	11.4~12.6	±0.5%	±1%	92.5%
CFM300S240	24 V	12.5 A	8.34 A	150 mV	±1%	22.8~25.2	±0.5%	±1%	93.5%
CFM300S360	36 V	8.34 A	5.56 A	150 mV	±1%	34.2~37.8	±0.5%	±1%	93.5%
CFM300S480	48 V	6.25 A	4.17 A	150 mV	±1%	45.6~50.4	±0.5%	±1%	94%
Stand-by Output Voltage									
All	+5 V	1A	0.6A	100 mV	±3%	--	±1%	±5%	--
Fan Output Voltage									
All	+12 V	--	0.5A	--	--	--	--	--	--

Note:

1. Requires 10CFM.
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.
3. Voltage accuracy is set at full load.
4. Line regulation is measured from 100V<sub>ac</sub> to 240Vac with full load.
5. Load regulation is measured from 10% to 100% full load.
- 6 Typical efficiency at 230 V<sub>ac</sub> and 100% full load at 25°C.
7. No load power consumption<0.3W by PS on/off remote control.
8. PS-ON and GND short, I<sub>PS-ON</sub> =4.5 mA typical.
9. Input connector (CN1) wafer with TAIWAN KING PIN TERMINAL PVHI series and mate with JST housing VHR series or equivalent.
10. Optional input connector (CN1) wafer with LONG CHU P3060 series and mate with MOLEX housing 5195 series or equivalent.
11. Output connector CN4 wafer with JST PH series and mate with JST housing PH series or equivalent.
12. Output connector CN5 wafer with TAIWAN KING PIN TERMINAL P110I series and mate with JST housing PH series or equivalent.
13. Output connectors (Vo+ & Vo- with M3 screw) mate with round terminal and round terminal of the max. outer diameter is 6.75mm, max. inner diameter is 3.9mm.



# CFM300S Series

## PART NUMBER

Series	Number of Outputs	Nominal Output Voltage	Type
CFM300	O	XXX	Y
CFM300	S : Single	120 : 12V 240 : 24V 360 : 36V 480 : 48V	None : With Baseplate C : With Cover

Part Number Example:

**CFM300S120:** With Baseplate, 300W, 12Vdc Output

**CFM300S120C:** With Case, 300W, 12Vdc Output



# CFM300S Series

## TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

### ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage		All	90		264	V <sub>ac</sub>
			120		370	V <sub>dc</sub>
Operating Temperature	See Derating Curve	All	-40		80	°C
Storage Temperature		All	-40		85	°C
Operating Altitude		All			5000	m

### INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Voltage Range		All	100		240	V <sub>ac</sub>
Input Frequency Range		All	47		63	Hz
Maximum Input Current	100% Load, V <sub>in</sub> =100V <sub>ac</sub>	All			4	A
Leakage Current (Earth)		All		0.26	3.5	mA
Inrush Current	V <sub>in</sub> =240V <sub>ac</sub> , Cold start @25°C	All			30	A
Power Factor	230V <sub>ac</sub> @ Full load	All	0.95			

### OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	V <sub>in</sub> =Nominal V <sub>in</sub> , I <sub>o</sub> =I <sub>o</sub> max., T <sub>c</sub> =25°C	CFM300S120 CFM300S120C	11.4	12	12.6	V <sub>dc</sub>
		CFM300S240 CFM300S240C	22.8	24	25.2	
		CFM300S360 CFM300S360C	34.2	36	37.8	
		CFM300S480 CFM300S480C	45.6	48	50.4	
Operating Output Current Range	V <sub>in</sub> =90V <sub>ac</sub> ~264V <sub>ac</sub> , See Derating Curve	CFM300S120 CFM300S120C	0		25	A
		CFM300S240 CFM300S240C	0		12.5	
		CFM300S360 CFM300S360C	0		8.34	
		CFM300S480 CFM300S480C	0		6.25	
Holdup Time	V <sub>in</sub> =115V <sub>ac</sub>	All		20		ms
Output Voltage Regulation						
Load Regulation	10% Load to full load	All			±1.0	%
Line Regulation	V <sub>in</sub> =High line to low line	All			±0.5	%
Output Voltage Adjustment	P <sub>o</sub> ≤ max. rated power, I <sub>o</sub> ≤ I <sub>o</sub> max.	All	-5		+5	%
Over Voltage Protection	Latch off (AC recycle to reset)	CFM300S120 CFM300S120C		15		V <sub>dc</sub>
		CFM300S240 CFM300S240C		30		
		CFM300S360 CFM300S360C		43		
		CFM300S480 CFM300S480C		56		
Over Current Protection	Auto recovery (hiccup mode)	All	130	150	180	%



# CFM300S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Short Circuit Protection	Auto recovery	All				
Over Temperature Protection	Auto recovery (the temperature of C37)	All			110	°C
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output 2. Oscilloscope is 20MHz band width 3. Ambient Temperature=25°C	CFM300S120 CFM300S120C			120	mV
		CFM300S240 CFM300S240C			150	
		CFM300S360 CFM300S360C			150	
		CFM300S480 CFM300S480C			150	
Load Capacitance	1. $V_{in}=115V_{ac}$ and $230V_{ac}$ 2. Output is max. load 3. Ambient temperature=25°C	CFM300S120 CFM300S120C			25000	uF
		CFM300S240 CFM300S240C			12500	
		CFM300S360 CFM300S360C			5000	
		CFM300S480 CFM300S480C			3750	
Efficiency	1. Input Voltage is $230V_{ac}$ 2. Output is rated load 3. Ambient temperature=25°C	CFM300S120 CFM300S120C		92.5		%
		CFM300S240 CFM300S240C		93.5		
		CFM300S360 CFM300S360C		93.5		
		CFM300S480 CFM300S480C		94.0		
PS-On Signal	Power on	All	0		2	$V_{dc}$
	Power off (PS-ON and GND open)		11		16	
	Power on (PS-ON and GND short) Power-off (PS-ON and GND open)			Source Current 4.5		0
Power Good (PG)	1. Input Voltage is $90 V_{ac} \sim 230V_{ac}$ 2. Output is max. load 3. The TTL goes high after power set up	All	50		250	ms
Power Fail (PG)	1. Input Voltage is $90 V_{ac} \sim 230V_{ac}$ 2. Output is max. load 3. The TTL goes low before $V_o$ below 90% rated value	All	5		20	ms

## ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input to Output	1 Minute (without dielectric breakdown)	All			3000	$V_{ac}$
Input to Earth (Ground)	1 Minute (without dielectric breakdown)	All			1800	$V_{ac}$
Output to Earth (Ground)	1 Minute (without dielectric breakdown)	All			1800	$V_{ac}$
Isolation Resistance	Input to output	All	100			MΩ

## FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	$P_{out}$ =max. rated power	All		70		kHz

## GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$ ; $T_a=25^\circ C$ per MIL-HDBK-217F $I_o=100\%$ ; $T_a=25^\circ C$ , Telcordia SR332	All	1295	160		k hours
Life Time	@75% Load, $40^\circ C$ with fan	All	128			k hours
Humidity	Non-condensing	All			93	% RH
Shock	Meet MIL-STD-810F Table 516.5, Table 516.5-I 10ms, each axis 3 times( $\pm X$ 、 $\pm Y$ 、 $\pm Z$ axis)	All		75		g



# CFM300S Series


## GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Vibration	Meet MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X · Y · Z axis, 1 hour (each axis),. Total 3 hrs.	All		4		g
Weight		CFM300SXXX CFM300SXXXC		420 550		grams
Dimensions	With Baseplate	All	5.000x3.000x1.421 Inches (127.00x76.20x36.10 mm)			
	With Cover		5.354x3.425x1.591 Inches (136.00x87.00x40.40 mm)			
<b>Safety</b>	Class I IEC/EN/UL 62368-1					Ed. 3.0
<b>EMC Emission</b>	EN 55032, EN 55022, EN 61000-3-2, EN 61000-3-3, FCC CFR 47 Part 15 Subpart B					
Conducted Disturbance	EN 55032:2012+AC:2013, EN 55032:2015+A11:2020, Class B, FCC CFR 47 Part 15 Subpart B					Class B
Radiated Disturbance	EN 55032:2012+AC:2013, EN 55032:2015+A11:2020, Class B, FCC CFR 47 Part 15 Subpart B					Class B
Harmonic Current Emissions	IEC 61000-3-2:2019					Class C&D
Voltage Fluctuations & Flicker	IEC 61000-3-3:2013+A1:2019					Criterion A
<b>EMC Immunity</b>	IEC 61000-4-2, 3, 4, 5, 6, 8, 11					
Electrostatic Discharge (ESD)	IEC 61000-4-2:2008, ±2kV, ±4kV					Criterion A
Radio-Frequency, Continuous Radiated Disturbance	IEC 61000-4-3:2020					Criterion A
Electrical Fast Transient (EFT)	IEC 61000-4-4:2012, ±0.5kV, ±1kV, ±2kV					Criterion A
Surge	IEC 61000-4-5:2014+A1:2017, L-N: ±0.5kV, ±1kV, L-PE, N-PE: ±0.5kV, ±1kV, ±2kV					Criterion A
Conducted Disturbances, Induced by RF Fields	IEC 61000-4-6:2013					Criterion A
Power Frequency Magnetic Field	IEC 61000-4-8:2009					Criterion A
Voltage Dips	IEC 61000-4-11:2020, Dip: 30% reduction, Dip: 70% reduction					Criterion A
Voltage Interruptions	IEC 61000-4-11:2020, >95% reduction					Criterion B
Application Note Link						<a href="#">CFM300S Series App Notes</a>


## CHARACTERISTIC CURVE

### Power Derating Curve

CFM300SXXX Series

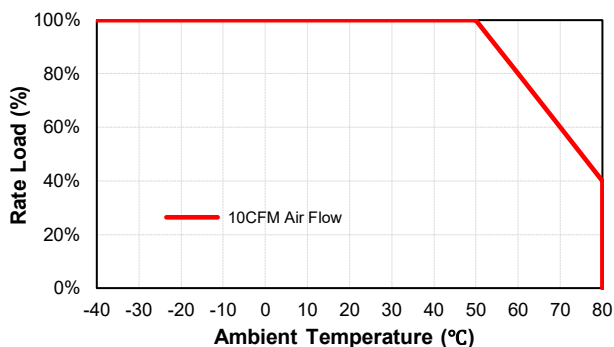


CFM300SXXXC Series

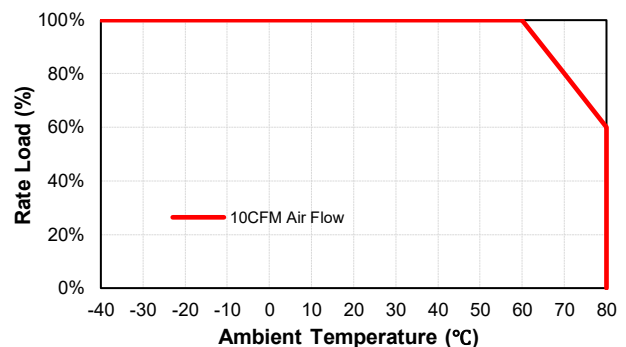




# CFM300S Series


CFM300SXXX Series

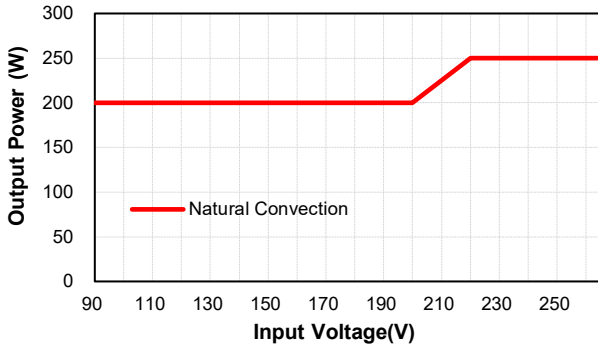


CFM300SXXXC Series

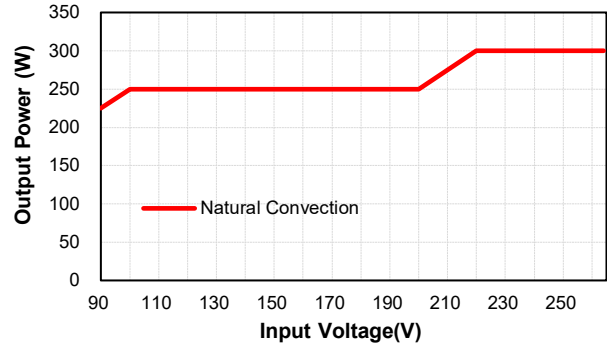

CFM300SXXX Series  
Nature Convection

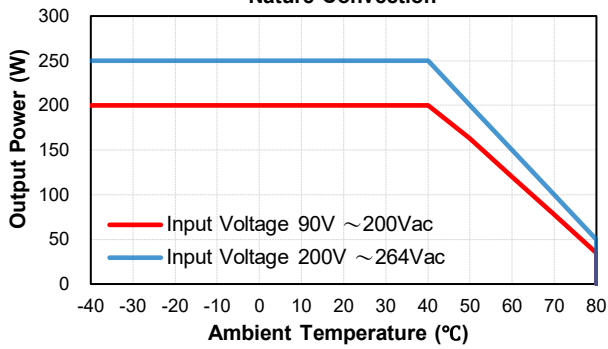


CFM300SXXXC Series  
Nature Convection

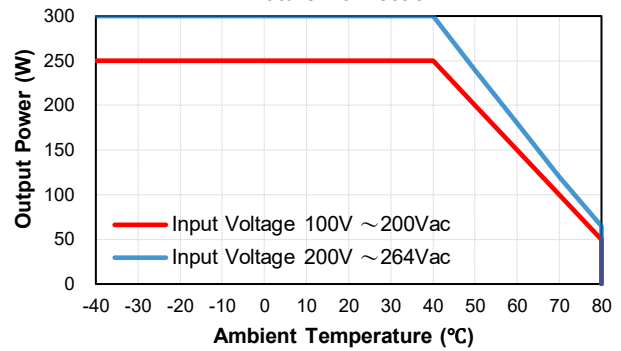


## Performance Data


CFM300S120 (Eff Vs Io)

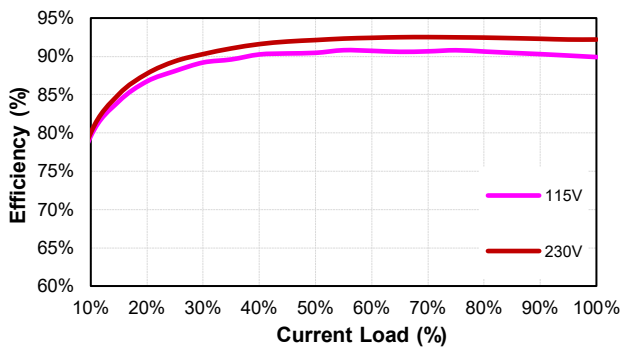


CFM300S240 (Eff Vs Io)

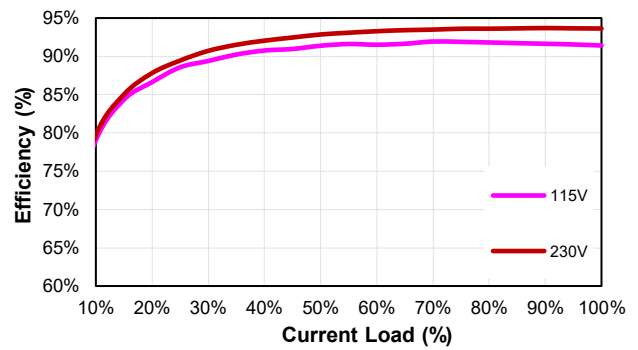

CFM300S360 (Eff Vs Io)

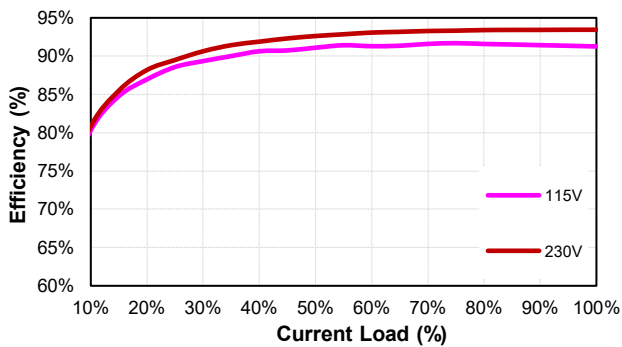




CFM300S480 (Eff Vs Io)

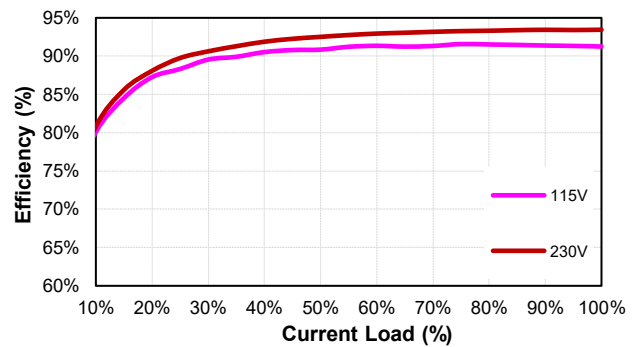



# CFM300S Series

## MECHANICAL SPECIFICATION

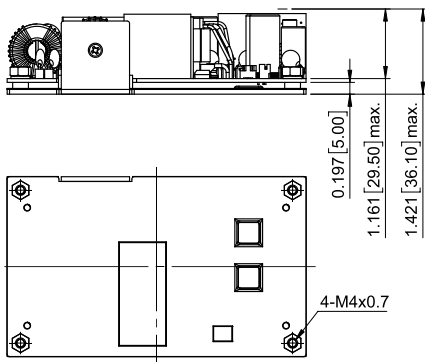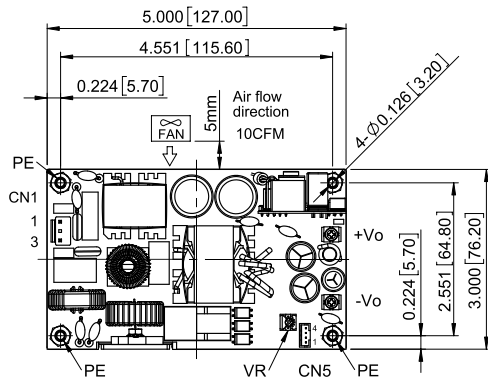

### CFM300SXXX

All Dimensions in Inches[mm]  
Tolerance Inches: x.xxx=±0.020  
Millimeters: x.xx=±0.50

AC Input Connector(CN1):TKP PVHI-03N2 or equivalent

Pin	Function	Mating Housing	Terminal
1	ACL	JST VHR-3N or equivalent	JST SVH-21T-P1.1 or equivalent
2	-		
3	ACN		

DC Output Connector(CN4):JST S6B-PH-K-S(LF)(SN) or equivalent




Pin	Function	Mating Housing	Terminal
1	FAN Output-	JST PHR-6 or equivalent	JST SPH-002T-P0.5L or equivalent
2	FAN Output+		
3	GND		
4	+5VSB		
5	GND		
6	PS-ON		

DC Output Connector(CN5):TKP P110I-04 or equivalent

Pin	Function	Mating Housing	Terminal
1	GND	JST PHR-4 or equivalent	JST SPH-002T-P0.5L or equivalent
2	PG		
3	-Sense		
4	+Sense		

DC Output Connector:KANG YANG PCB-17AB-1 or equivalent

Function	The screw locked torque
+Vo	M3 3kgf-cm
-Vo	

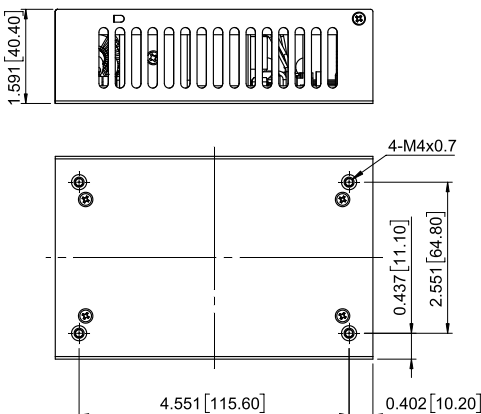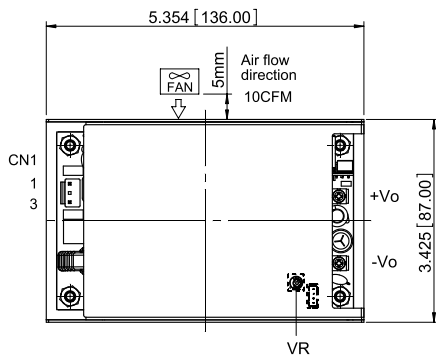

### CFM300SXXXC

All Dimensions in Inches[mm]  
Tolerance Inches: x.xxx=±0.020  
Millimeters: x.xx=±0.50

AC Input Connector(CN1):TKP PVHI-03N2 or equivalent

Pin	Function	Mating Housing	Terminal
1	ACL	JST VHR-3N or equivalent	JST SVH-21T-P1.1 or equivalent
2	-		
3	ACN		

DC Output Connector(CN4):JST S6B-PH-K-S(LF)(SN) or equivalent

Pin	Function	Mating Housing	Terminal
1	FAN Output-	JST PHR-6 or equivalent	JST SPH-002T-P0.5L or equivalent
2	FAN Output+		
3	GND		
4	+5VSB		
5	GND		
6	PS-ON		

DC Output Connector(CN5):TKP P110I-04 or equivalent

Pin	Function	Mating Housing	Terminal
1	GND	JST PHR-4 or equivalent	JST SPH-002T-P0.5L or equivalent
2	PG		
3	-Sense		
4	+Sense		

DC Output Connector:KANG YANG PCB-17AB-1 or equivalent

Function	The screw locked torque
+Vo	M3 3kgf-cm
-Vo	

CINCON Electronics Co. Ltd.  
Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan  
Tel: 886-2-27086210  
Fax: 886-2-27029852  
E-mail: [sales@cincon.com](mailto:sales@cincon.com)  
Web: [www.cincon.com](http://www.cincon.com)