


# SL POWER NCF150 SERIES

120/150 Watts CF Rated Medical

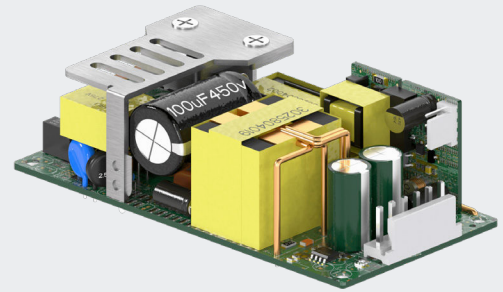

Advanced Energy's SL NCF150 series are CF rated products for critical medical applications needing low leakage current. Voltages of 12V, 15V, 19V, 24V, and 48V together with an optional 5V standby and 12V fan output. Each model accepts a universal input of 85 to 264VAC. Full-Load efficiency of greater than 90%, these compact sitch-mode power supplies feature output overvoltage and short-circuit protection. These units are ideal for use in industrial and medical applications.

## AT A GLANCE

### Total Power

150 W

### Input Voltage

85 to 264 VAC

### # of Outputs

Single

## SPECIAL FEATURES

- 150 W max output power
- 4.0" x 2.0" x 1.26"
- Industrial/Medical safety
- -40°C to 70°C with derating
- 5 V standby @ 0.5 A  
12 V fan output @ 0.4 A
- High efficiency: 90% typical
- ± 10% adjustment range

## SAFETY

- UL UL60601
- CSA No. 60601
- CB Report EN60601-1  
IEC60601-1

## EMI/EMC


- EMI Class B
- IEC/EN61000 4th edition

## ELECTRICAL SPECIFICATIONS


Input	
Input Range	85 to 264 VAC (Operating) (Safety Rating 100 to 240 VAC). Derating below 90 VAC
Frequency	47 to 63 Hz
Power Factor	0.9 minimum
Inrush Current	240 VAC, cold start: will not exceed 80 A peak (<2 ms Duration).
Harmonics	Meets EN61000-3-2, Class A
Input Current	2.5A max at 90VAC input
Hold Up Time	16 ms minimum for main O/P, Measured at Full Load from 115 VAC and Vout reduces to 90% of original value before the AC drop out.
Efficiency	91% min at 115 VAC/230 VAC, full load
Leakage Current	<250 uA @ 264Vac, 60 Hz input, Normal Conditions (Output-Earth) <10 uA @ 264Vac, 60 Hz input, Normal Conditions (Output-Input) <50 uA @ 264Vac, 60 Hz input, Single Fault Conditions (Output-Input)
Turn On Time	3 s max at 115 VAC
Insulation Safety Rating	Input to GND 1500 VAC (1 MOPP) Input to Output 4000 VAC (2 MOPP) Output to GND 1500 VAC (1 MOPP)
Output	
Output Power	120 Watts (Convection); 150 Watts (200 LFM Airflow)
Load Regulation	± 2% for Main & 5 VSB, ± 20% for Fan
Line Regulation	± 0.5%
Minimum Load	None required
Ripple and Noise	1% of Vout
Output Adjustability	± 10%
Over Load Protection	120% to 180% of rated output current value, hiccup mode, auto-recovery
Short Circuit Protection	Short across the output terminals will not cause damage to the unit. hiccup mode
Over Voltage Protection	115% to 155% of nominal output voltage. Latching, recycle AC power to recover.
Over Temperature Protection	Will shut down upon an overtemperature condition, auto-recovery.

## ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-20°C to +70°C (output power derated to 50% load at 70°C)
Storage Temperature	-40°C to +85°C
Humidity	5% to 95%, non-condensing
MTBF	>250 K hours
Altitude	Operating: -500 m to 5,000 meters
Vibration	Random vibration per MIL-STD-810E, Method 514.4, Cat. 1, Figure 514.4-1, 1 hr in each of three axes
ROHS	Product must be ROHS compliant
REACH	REACH compliance required

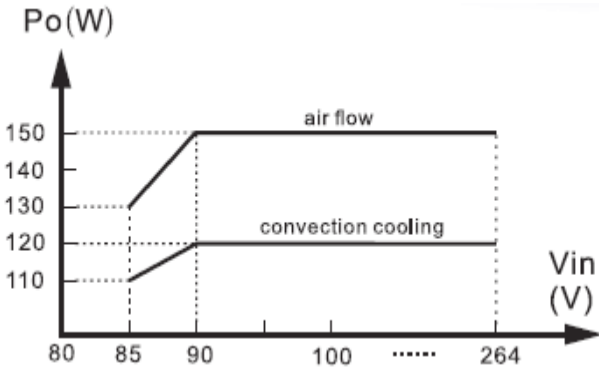

Output Power Vs Input Voltage

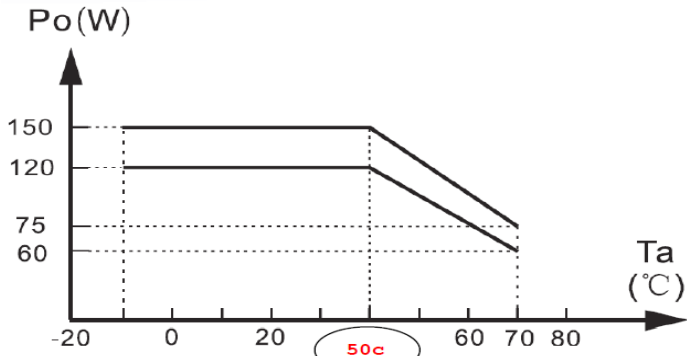

Output Power Vs Ambient Temperature

**ORDERING INFORMATION**

Model Number <sup>1</sup>	Output Voltage	Minimum Load	Maximum Load with Convection Cooling	Maximum Load with 200LFM Forced Air	Max Power	Regulation	Ripple P/P(PARD)
NFC150S12K	12 V	0 A	10 A	12.5 A	150 W	± 2%	120 mV
NFC150S15K	15 V	0 A	8.0 A	10.0 A	150 W	± 2%	150 mV
NFC150S19K	19 V	0 A	6.32 A	7.9 A	150 W	± 2%	190 mV
NFC150S24K	24 V	0 A	5.0 A	6.25 A	150 W	± 2%	240 mV
NFC150S36K	36 V	0 A	3.3 A	4.16 A	150 W	± 2%	360 mV
NFC150S48K	48 V	0 A	2.5 A	3.13 A	150 W	± 2%	480 mV

<sup>1</sup>Note 1: Contact AEI for availability of the 36V model or other output voltages.

**PIN ASSIGNMENT**

Connector	Definition	Pin Number(s)
AC Input (CN1)	AC Line	#3
	AC Neutral	#1
	Ground	PE
DC Output (CN2)	+Vout	# 4&5&6
	-Vout	# 1&2&3
Standby & Fan Connector (SCN1)	5V Standby	#1
	5V Standby Return	#2
	12V Fan Output	#3
	12V Fan Return	#4

**MATING CONNECTOR**

AC Input	TE/AMP# 640445-3 Mates With: AMP 640250-3	#1 AC NEUTRAL #3 AC LINE
DC Input	TE/AMP# 640445-6 Mates With: AMP 640250-6	#1, #2, #3 -Vout #4, #5, #6 +Vout
Standby & Fan Connector	Landwin P/N: 2511P0200T Mates With: 260050200	#1 5V Standby #2 5V Standby Return #3 +12V Fan Output #4 -12V Fan Output

\*Note: All connectors can be applied with equivalent products.

## EMI/EMC COMPLIANCE


Parameter	Specification
Conducted Emissions	CISPR32 Class B EN55032 Class B, at 115 and 230Vac, at 50% and 100% load steps.
Radiated Emissions	CISPR32 Class B EN55032 Class B, at 115 and 230Vac, at 50% and 100% load.
Harmonic Current Emissions	EN61000-3-2, Class A.
Flicker	IEC61000-3-3
Electro Static Discharge (ESD) Immunity	IEC61000-4-2, IEC60601-1-2, 4th Edition, Level 4: +/- 8kV contact, +/- 15kV air, Criteria A.
Radiated RF EM Fields Susceptibility	IEC61000-4-3, IEC60601-1-2, 4th Edition, 10V/m, 80MHz to 2.7GHz, 80% AM at 1kHz, Criteria A.
Electrical Fast Transients (EFT)/Bursts	IEC61000-4-4, IEC60601-1-2, 4th Edition.
Surges - Line to Line (DM) and Line to GND (CM)	IEC61000-4-5, IEC60601-1-2, 4th Edition, Level 4, +/-2kV DM, +/-4kV CM, Criteria A.
Conducted Disturbances induced by RF Fields	IEC61000-4-6, IEC60601-1-2, 4th Edition, 3V/m – Level 4, 0.15 MHz to 80 MHz; and 12V/m in ISM and amateur radio bands between 0.15 MHz and 80 MHz, 80% AM at 1 KHz IEC60601-1, Criteria A.
Rated Power frequency magnetic fields	IEC61000-4-8, IEC60601-1-2, 4th Edition, Level 4: 30A/m, 50/60 Hz, Criteria A.
Voltage Interruptions, Dips, Sags & Surges	IEC61000-4-11, IEC60601-1-2, 4th Edition, -100% dip for 10 mS, at 0, 45, 90, 135, 180, 225, 270 and 315 degrees: --100% dip for 20mS, 0 deg., Criteria A, --100% dip for 4000mS (250/300 cycles), Criteria B - 30% dip for 500mS, Criteria A.

Note - EMI filtering is provided to meet the EMC requirements above. Unless otherwise stated, all tests are done at full load and 115 and 230Vac input. If any test would be marginal at other conditions, testing may be done at other stated conditions. All tests are to be performed in accordance with the stated standard. Acceptance is based on the supply continuing to function properly. Under some conditions, the outputs may pass through some level of signal.

According to the standards, performance criteria are defined as following:

- A - Normal performance during and after the test
- B - Temporary degradation, self-recoverable
- C - Temporary degradation, operator intervention required to recover the operation
- D - Permanent damage

MECHANICAL DRAWINGS

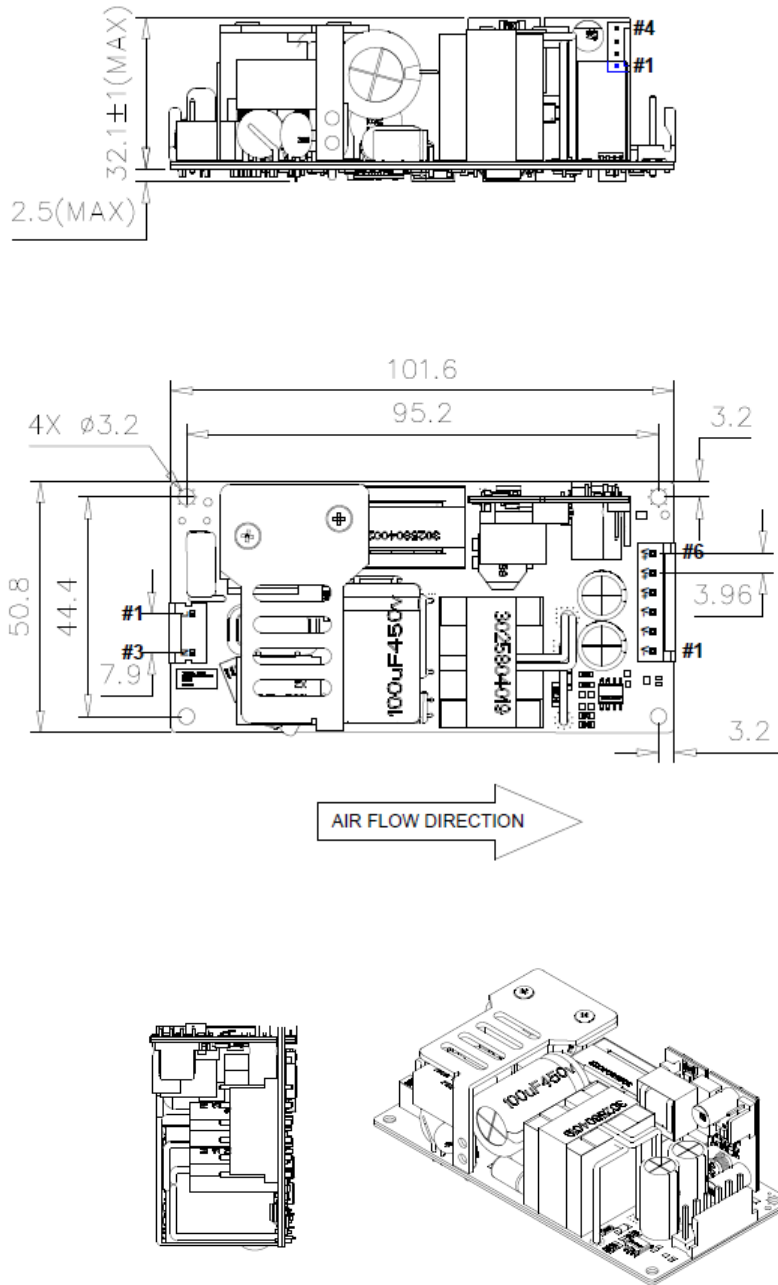

## FEATURE

The NCF series models are suitable for CF rated applications as they provide the below features:

1. Clearance and creepage requirements between primary and ground for one MOPP, primary and secondary for two MOPP and secondary and ground for one MOPP.
2. Hi-pot tests between primary and ground, primary and secondary and secondary and ground.
3. Type CF patient leakage current  $<10\mu\text{A}$  under normal condition and  $<50\mu\text{A}$  under single fault condition

Note: As the NCF series is classified as a component power supply, it cannot be declared an applied part, and therefore cannot be declared CF rated. However, the NCF Series has been evaluated for and meets the requirements related for use in CF applications.



For international contact information,  
visit [advancedenergy.com](https://www.advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com) (Sales Support)  
[productsupport.ep@aei.com](mailto:productsupport.ep@aei.com) (Technical Support)  
+1 888 412 7832

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than four decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

**PRECISION | POWER | PERFORMANCE | TRUST**

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2024 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, and AE® are U.S. trademarks of Advanced Energy Industries, Inc.